




HISCO DVR^C

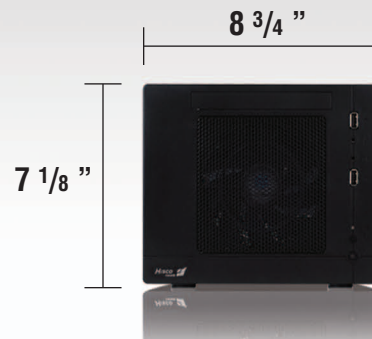

Compact and High Performance DVR

HISCO DVR^C | Compact and Better Way to Manage Digital Video

The Hisco DVR^C represents the new era of flexibility and integration of Digital Video Surveillance. This incredibly versatile DVR is a perfect solution for medium to large size retail businesses. With an extremely user-friendly Graphical User Interface (GUI), users can view live and recorded video remotely via TCP/IP network. The Hisco DVR^C offers a perfect solution for both security professionals and business owners who want unparalleled flexibility, reliability and outstanding clarity.

Hisco DVR^C Features

- Choice of 4, 8, 16 channel DVR
- Choice of MPEG-4 or M-JPEG image compression
- Playback by date, time, event and camera
- Ultra fast timeline search
- Advanced search based on motion and event
- Built-in motion detection
- Covert camera operation
- Resolution settings: 640x480, 640x240, 320x240
- Compact size and less carbon footprint
- 500 GB HDD for video storage
- Optional 1TB video storage
- SSD for OS/DVR program (for 8 and 16 ch DVR)
- Scheduled recording for each individual camera
- Bandwidth throttle
- Password protected multiple user access function
- PTZ camera control with pre-set function
- Quick and easy video backup
- Fast remote access and administration



HISCO DVR ^C SPECIFICATIONS



VIDEO

Video Input	4, 8, or 16 inputs, 1.0 Vp-p, 75 Ohms
Video Compression	MPEG-4/M-JPEG
Recording Speed	30, 120 IPS (NTSC)
Display Speed	30, 120 IPS (NTSC)
Recording Resolution	320 x 240, 640 x 240, 640 x 480
Video Output	Main Monitor: VGA Secondary Monitor: DVI (Dual monitor capability, 8, 16 ch models only) Spot Monitor: RCA

HARDWARE

HDD Configuration	500 GB for Video, SSD Drive for OS/DVR program (only for 8 ch and 16 ch)
Backup Device	DVD+/-RW
Alarm Inputs	Optional 4 relay inputs
Alarm Outputs	Optional 4 relay outputs
Network Connectivity	100/1000 base Ethernet
PTZ Control	RS 232, RS 485 (Optional)
USB Port	6 USB 2.0 connectors
Operating System	Windows XP Professional

GENERAL

Dimension (W x H x D)	8 3/4 x 7 1/8 x 11 in
Weight	25 lb
Power	115 – 120 VAC, 50-60 Hz
Operating Temperature	10 ~ 35°C

SOFTWARE

Recording Modes	Manual, Continuous, Motion, Audio Sensor, Motion & Sensor, Event
Search Methods	Timeline, Index, Date & Time, Event, Smart Search, Quick Search
Image Export Format	Native Image Format(EXE), AVI, JPEG, BMP
Image Verification	Proprietary Digital Format
Supported PTZ Cameras	Pelco (D-Protocol), SAMSUNG(SCC-641), Niko(NK-97CHE), KALATEL, PIH-7000, Panasonic (WV-CS854), Vicon (V1311RB-3W), SDC125(SDH870), AD ULTRA VII
Multi-level Password Access	3 levels
Remote Conneciton Methods	EyeClient Web browser CMS

HISCO DVR ^C MODEL NUMBER CONFIGURATION



	Hisco	SERIES	CHANNELS	STORAGE
EXAMPLE:	HIS -	DVRC	04	500
<i>HIS-DVRC04-500</i>			04 = 4 channels 08 = 8 channels 16 = 16 channels	500 = 500 GB 1000 = 1 TB

Option:

HIS-RSCDIDO4 RS 232 to 485 convertor for PTZ, 4 alarm inputs and 4 alarm outputs

Please contact Hisco Canada for part numbers