


HIS-BBM24F



Features

- 1/3 inch Sony Super HAD CCD II
- Ultra High Resolution : 600 TV Lines
- TDN(ICR), DNR
- Min. Illumination : 0.01 Lux (B/W)
- OSD, Auto White Balance
- AGC, SBLC, Flickerless
- Motion Detection, Privacy Zone, Mirror Function
- RS-485(Pelco-D, CNB) Interface
- 24VAC / 12VDC Dual Voltage

DIMENSIONS

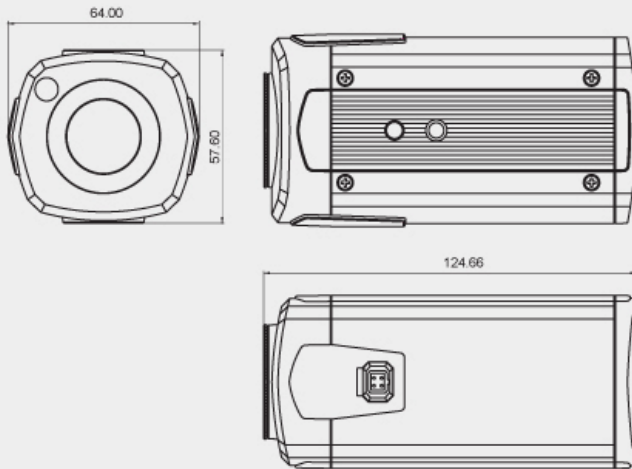

SPECIFICATIONS

| Model | HIS-BBM24F |
|--------------------------|---------------------------------|
| Signal System | NTSC |
| Scanning System | 2:1 Interlace |
| Sync. System | Internal |
| Scanning Frequency (H) | 15.734 kHz |
| Scanning Frequency (V) | 59.94 kHz |
| Image Sensor | 1/3 Inch SONY Super HAD CCD II |
| Total Pixels | 811(H) x 508(V) 410K |
| Total / Effective Pixels | 768(H) x 494(V) 380K |
| Horizontal Resolution | 600 TV Lines (BW 650TVL) |
| Lens Mount | CS Mount |
| Video Output Level | 1.0V p-p (75Ω Composite) |
| S/N Ratio | More than 50dB (AGC Off) |
| Day&Night Type | ICR (AGC Type) |
| Min. Illumination | 0.1 Lux (Color), 0.01 Lux (B/W) |
| Digital Noise Reduction | Low, Middle, High, Off |
| White Balance | AUTO |
| AGC | On/Off |
| SBLC | Off, Low, Middle, High |
| OSD | English, Chinese |
| Mirror Function | Horizontal |
| Privacy Zone | On/Off (4 Programmable Zone) |
| Motion Detection | On/Off (4 Programmable Zone) |
| Shutter Speed | 1/60~1/120,000 Sec. |
| Supplied Voltage | 24VAC / 12VDC Dual Voltage |
| Power Consumption | Max. 2.2W / 150mA |
| Dimensions (WxHxD) | 64(W) x 57.6(H) x 124.66(D) mm |
| Weight | Approx. 335g |