

HIS-CCM24VF


Built in Vari-focal Lens IR Camera



Features

- 1/3" High Sensitivity CCD
- Ultra High Resolution (600 TV Lines)
- Built-in DC Iris Vari-focal Lens (f=3.8~9.5mm)
- Built-in SR LEDs (2EA, Max.25m)
- **Intelligent IR Technology**
- TDN(ICR), OSD, SBLC, DNR
- Motion Detection, Privacy Zone, Mirror Function
- 12VDC/24VAC Dual Voltage

DIMENSIONS

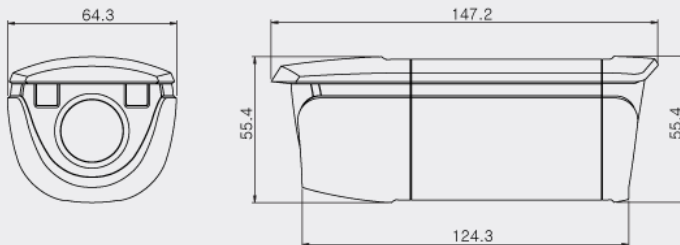

SPECIFICATIONS

Model	HIS-CCM24VF
Signal System	NTSC
Scanning System	2:1 Interlace
Sync. System	Internal
Scanning Frequency (H)	15.734 kHz
Scanning Frequency (V)	59.94 kHz
Image Sensor	1/3 Inch High Sensitivity CCD
Total Pixels	811(H) x 508(V) 410K
Total / Effective Pixels	768(H) x 494(V) 380K
Horizontal Resolution	600 TV Lines (BW 650TVL)
Lens	Vari-focal Lens (f=3.8~9.5mm)
Video Output Level	1.0V p-p (75Ω Composite)
S/N Ratio	More than 50dB (AGC Off)
Day&Night Type	ICR (AGC Type)
IR LED	Intelligent IR Technology , SR (Solid Reflective) LEDs 2 EA
IR LED Light Distance	Max. 25m
Min. Illumination	0.05Lux (Color), 0.005Lux (B/W), 0.00Lux (IR LED On)
Digital Noise Reduction	Low, Middle, High, Off
White Balance	Auto / Manual / Push
SBLC	Off, Low, Middle, High
Flickerless	On / Off
OSD	English, Chinese
Mirror Function	Horizontal
Privacy Zone	On/Off (4 Programmable Zone)
Motion Detection	On/Off (4 Programmable Zone)
Shutter Speed	1/60~1/120,000 Sec.
Supplied Voltage	12VDC/24VAC Dual Voltage (+10%, -20%)
Power Consumption	Max. 3.6W / 330mA
Dimensions (WxHxD)	67.9(W) x 58.7(H) x 155.4(D) mm
Weight	Approx. 241g