


HIS-SC3100



Features

- Commanding up to 255 devices (Incl. PTZ Cameras)
- LCD Display (20×4 Character, Edit Company Logo)
- Multiple Protocol Supported in Each Channel
- Easily Operate function (Preset, Pattern, Swing, Group)
- RS-485 Communications (Remote control up to 1.2Km)
- Support to use up to 4 Slave Controller
- Support to Password setup of the administrator
- Firmware Upgrade using RS-232(PC)
- Supports USB Mouse Function

DIMENSIONS

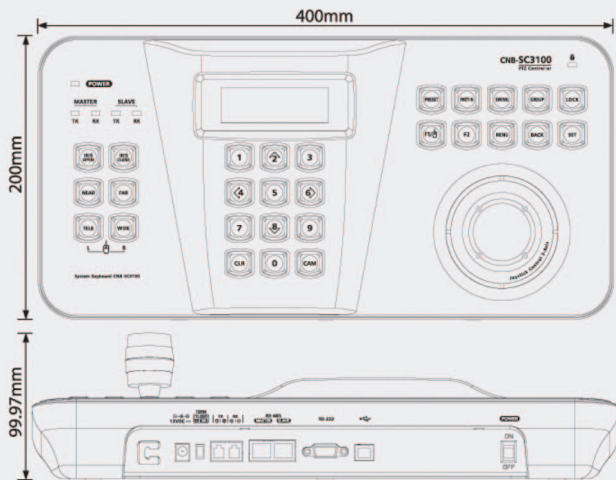

SPECIFICATIONS

Model	HIS-SC3100
Communication Type	Pan/Tilt interface:RS-485 (Remote control up to 1.2Km)
	DVR Interface: RS-485, USB
	USB: USB Mouse Function Support
	Protocol: Pelco D, Pelco P, Samsung Etc.
LCD Display	20 × 4 Character LCD
PTZ Control	Joystick (3 Axis Twist Zoom)
Sub Keyboard	Max.4 Devices (Including Master Keyboard)
RS-485 Specification	Type: Asynchronous Serial, 1 Start Bit, No Parity, 1 Stop Bit
	Transmission Type: Half Duplex
	Data Rate: 2400~38400 bps
RS-232	D-SUB 9P, Firmware Upgrade
Operation Voltage	12VDC/9V Battery/USB(PC)
Power Consumption	120 ~ 150mA
Operating Temperature	- 10 °C ~ 50°C / 60%
Dimensions	400(W) × 200(H) × 99.97(D) mm
Weight	About 1.24Kg (Excluding Adaptor)